


Pleat Medium Filter

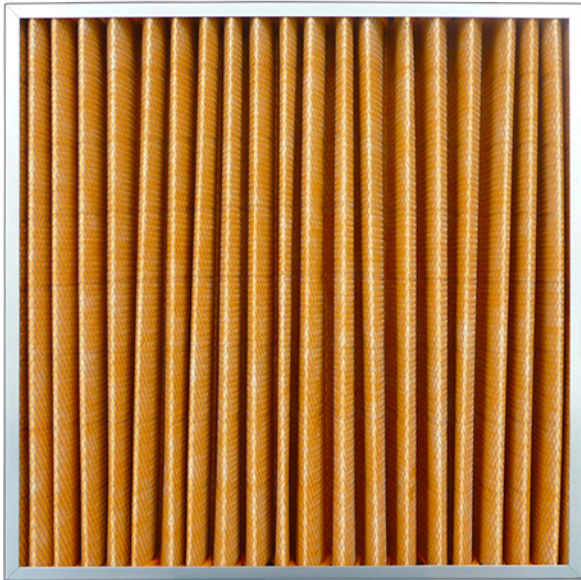

MATERIAL AND OPERATIONS CONDITIONS

Media: Synthetic fiber or non-woven fabrics

Efficiency: 65% - Merv 11 - F6 | 95% - Merv 16 - F9

Frame: Galvanized Steel

Sealant: With latex or universal glue

Max. Temperature: 50°C

Max. Humidity: 100%


PRODUCT INFORMATION

PRODUCT FEATURES

1. Surface mesh used by rust treatment process, good appearance and durable
2. Save space
3. 100% Factory inspection
4. Washable (Limited)
5. Large media area
6. Large dust holding capacity
7. Long life-span
8. Not easily deformation

APPLICATION



Electronic, pharmaceutical, mechanical instruments, metallurgy, petroleum, chemical, light industry, food and other areas of the general air purification.

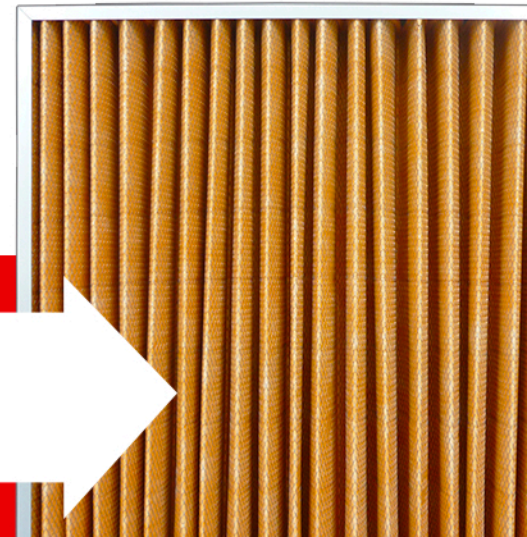

High Quality - Strong and Durable
100% Factory Inspection



Pleat Medium Filter

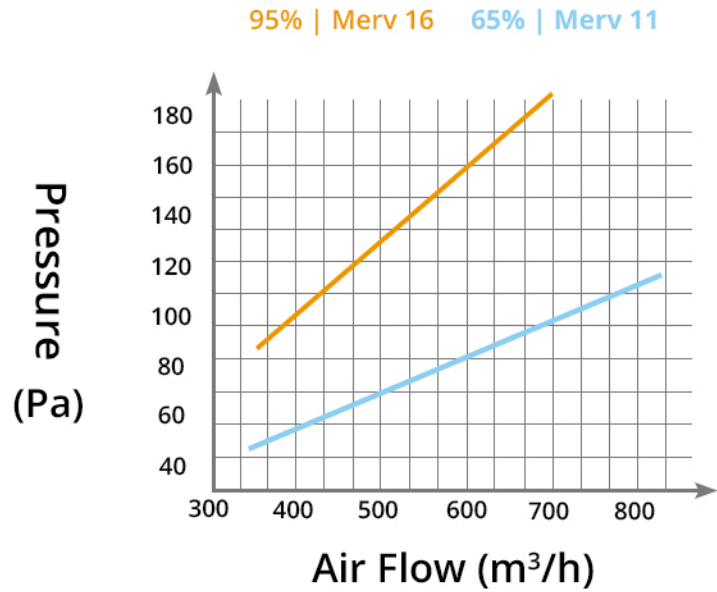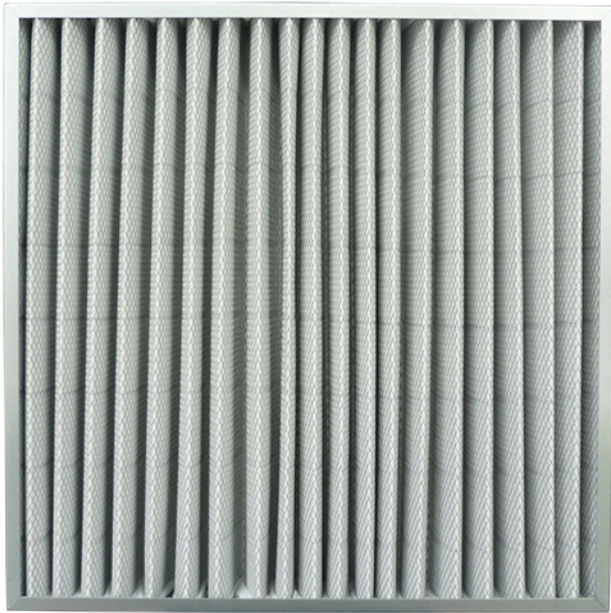

TECHNOLOGY PARAMETERS

Size (WxHxD) Inch	Size (WxHxD) mm	Air Flow (CFM)	Ini. Resistance (In. W.G)	Velocity (FPM)	Media Area (m²)	Efficiency (% Merv)
24 X 12 X 2	592 X 287 X 46	147	0.26	80.7	0.39	65 11
24 X 20 X 2	592 X 490 X 46	265	0.26	84.6	0.67	65 11
24 X 24 X 2	592 X 592 X 46	294	0.26	78.7	0.80	65 11
24 X 12 X 3	592 X 287 X 69	147	0.26	80.7	0.54	65 11
24 X 20 X 3	592 X 490 X 69	265	0.26	84.6	0.91	65 11
24 X 24 X 3	592 X 592 X 69	294	0.26	78.7	1.10	65 11
24 X 12 X 4	592 X 287 X 96	235	0.26	128	0.57	65 11
24 X 20 X 4	592 X 490 X 96	383	0.26	122	0.97	65 11
24 X 24 X 4	592 X 592 X 96	441	0.26	116	1.17	65 11
24 X 12 X 2	592 X 287 X 46	147	0.48	80.7	0.39	95 16
24 X 20 X 2	592 X 490 X 46	265	0.48	84.6	0.67	95 16
24 X 24 X 2	592 X 592 X 46	294	0.48	78.7	0.80	95 16
24 X 12 X 3	592 X 287 X 69	147	0.48	80.7	0.54	95 16
24 X 20 X 3	592 X 490 X 69	265	0.48	84.6	0.91	95 16
24 X 24 X 3	592 X 592 X 69	294	0.48	78.7	1.10	95 16
24 X 12 X 4	592 X 287 X 96	235	0.48	128	0.57	95 16
24 X 20 X 4	592 X 490 X 96	383	0.48	122	0.97	95 16
24 X 24 X 4	592 X 592 X 96	441	0.48	116	1.17	95 16